


P/N 22761-2F

MINIMUM PASSBANDS: 962-1008, 1053-1065, 1113-1215 MHz
 MAXIMUM PASSBAND LOSS: 1.5 dB (incl. BP filter), 0.75 dB TYP.
 MAXIMUM PASSBAND VSWR: 1.6:1 (1.5 TYP.)
 STOPBANDS: 1023-1037, 1083-1097
 MINIMUM STOPBAND REJECTION: -40 dBc (-45 dB TYP.)
 MINIMUM POWER HANDLING: 200 W PEAK, 40 W AV.
 TEMPERATURE: AT LEAST -30 C TO +65 C
 UNIT HAS LIGHTNING PROTECTION ON INPUT END

REVISIONS					
ZONE	LTR	ECN NO.	DESCRIPTION	DATE	APPROVED
	G	22761-2F-007	ELLIPTIC RE DESIGN	9-8-99	HB
	H	22761-2F-008	SEE ECN	11-22-99	HB

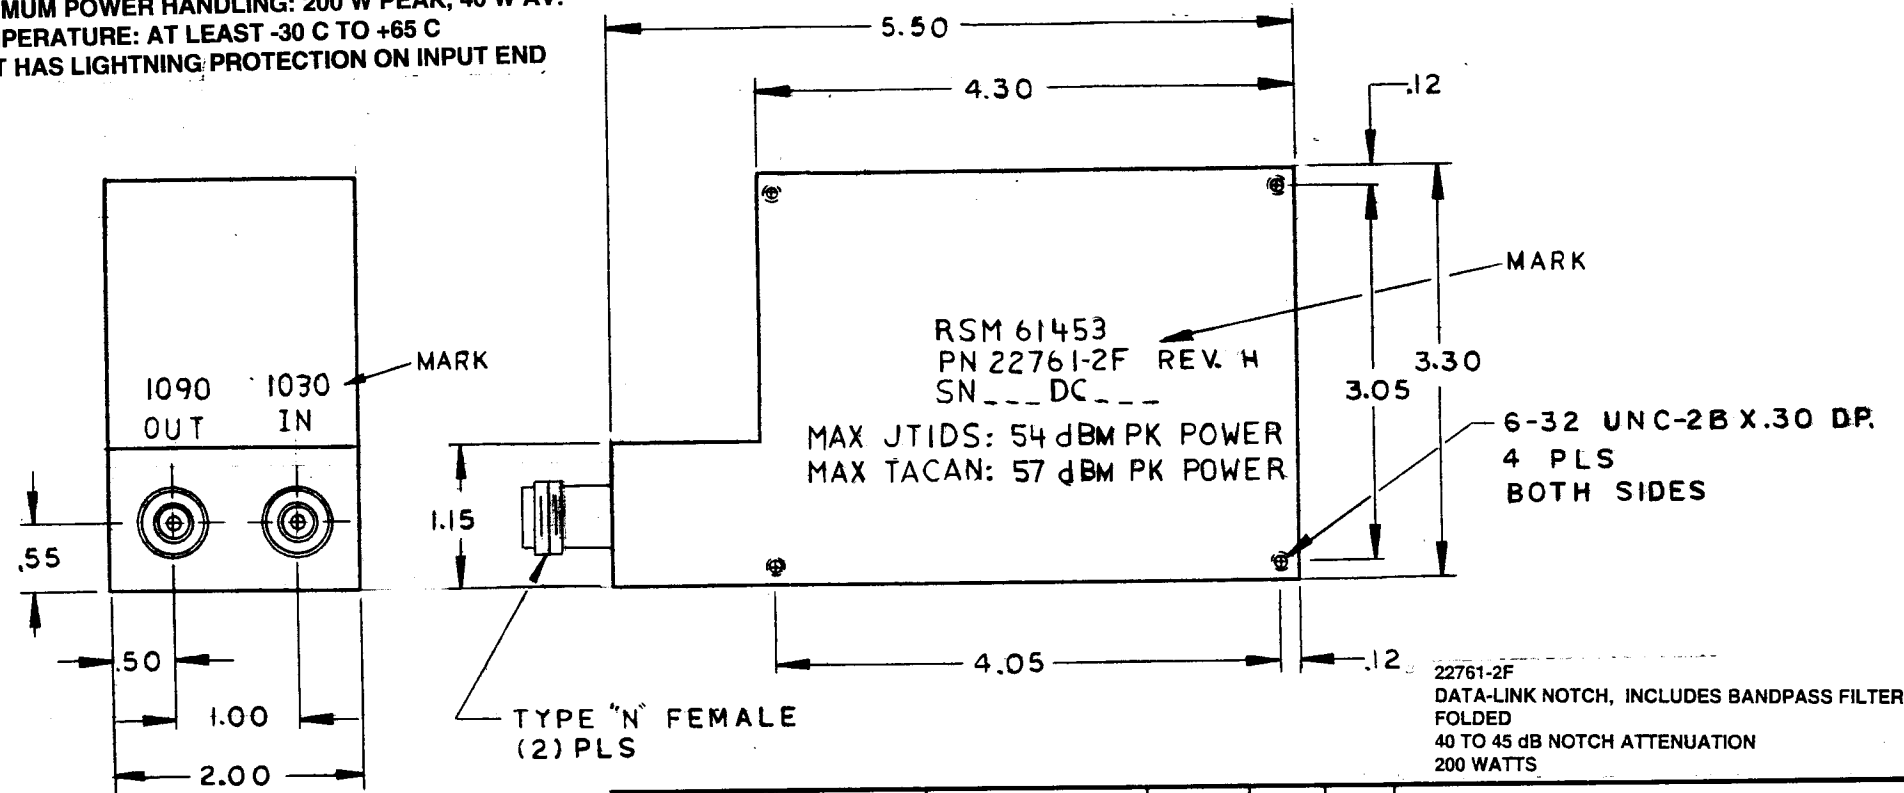

FINISH: MICROWAVE SILVERPLATE AND GRAY EPOXY PAINT
 WEIGHT: 3.2 LBS. MAX.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. AND INCLUDE FINISH: TOLERANCES ARE FRACTIONS ± 1/64 DECIMALS ± .01 ANGLES ± 0°15' SURFACE FINISH 63 CONCENTRICITY .004 TIR		SIGNED	DATE	RS MICROWAVE COMPANY, INC. 22 PARK PLACE, P.O. BOX 273 BUTLER, NEW JERSEY 07405 201-492-1207 FSCM 61453				
DRAWN	HB	1-28-93						
CHECKED	EJG	11-28-93						
E.E. APP'D								
M.E. APP'D								
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY RS MICROWAVE COMPANY INC.		Q.A. APP'D	HB	1-28-93	TITLE	1030-1090 DUAL NOTCH FILTER		
NEXT ASSY		USED ON		JOB NO.	SIZE	CODE IDENT. NO.	DWG NO.	REV.
					B	61453	22761-2F	H
					SCALE	1:1		SHEET
							OF	

NORTH JERSEY COPY 169714