


REVISIONS					
ZONE	LTR	ECN NO.	DESCRIPTION	DATE	APPROVED
	A	3334001-1	SEE ECN	6-11-84	E.C.
	B	3334001-2	SEE ECN		
	C	3334001-3	SEE ECN	1-10-85	E.C.
	D	3334001-4	SEE ECN REDRAWN, ADDED SPECS.		

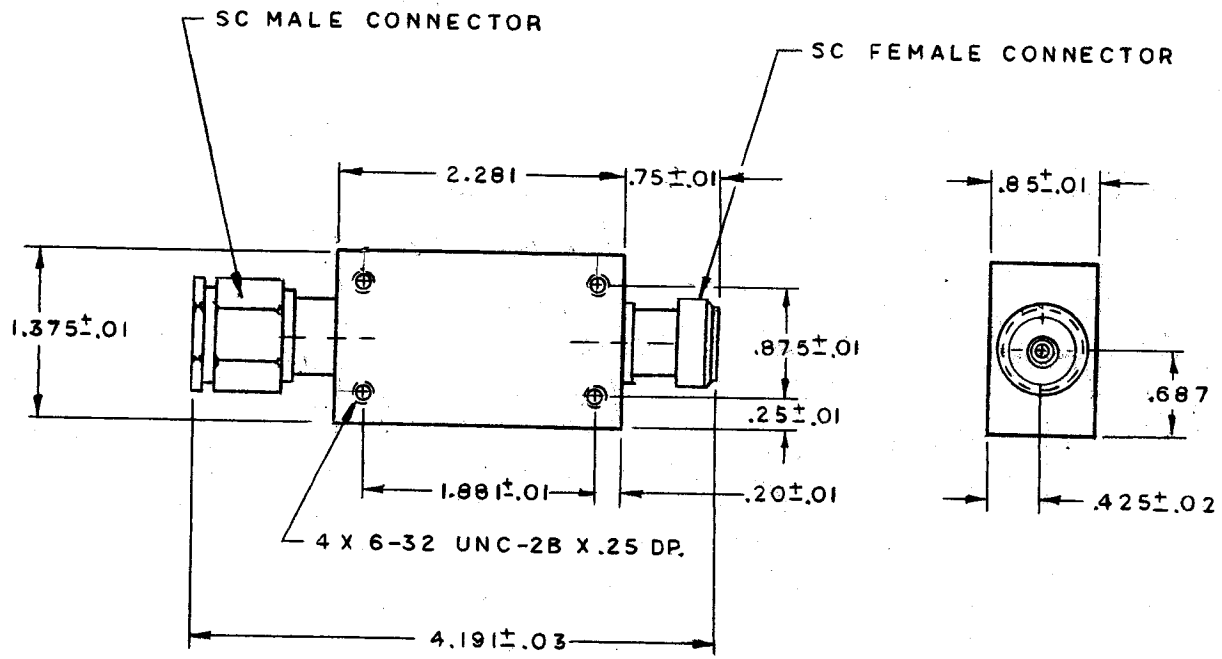

P/N 3334001

- Minimum Passband: 962-1215 MHz
- Maximum passband insertion loss: 0.3 dB, 0.15 dB typical
- Maximum passband VSWR: 1.25:1, 1.2:1 typical
- Impedance: 50 ohms
- Minimum -20 dBc rejection: DC-690, 1410-9000 MHz
- Minimum -50 dBc rejection: DC-100, 1920-9000 MHz
- Minimum power handling: 1200 W peak, 300 W average
- Temperature range: at least -30 to +65 C
- Altitude: 30,000 feet
- Shock, vibration, etc per MIL-E-5400

FINISH: MICROWAVE SILVER PLATE PER QQ-365, AND GRAY EPOXY POLYAMIDE PAINT PER MIL-C-22750E.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. AND INCLUDE FINISH. TOLERANCES ARE: FRACTIONS ± 1/64 DECIMALS ± .01 ANGLES ± 0°15' SURFACE FINISH- 63 CONCENTRICITY .004 TIR		SIGNED		DATE		RS MICROWAVE COMPANY, INC. 22 PARK PLACE, P.O. BOX 273 BUTLER, NEW JERSEY 07406 201-462-1207 F8CM 91453	
DRAWN		HB		3-19-04			
CHECKED		EJG		3-19-04			
E E APP'D							
M E APP'D		EJG		3-19-04			
Q A APP'D		HB		3-19-04		TITLE	
JOB NO.						(LOW PASS) FILTER	
NEXT ASSY		USED ON		SIZE	CODE IDENT. NO.	DWG NO.	REV.
				B	61453	3334001	D
				SCALE FULL		SHEET OF	

PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY RS MICROWAVE COMPANY INC.